



**JAGFENCE®**

# TRIPLE POINT™

When you're serious about security



## For commercial and industrial applications

Power Stations Shipping Terminals Refineries Airports Defence Facilities

**TRIPLE POINT™** is an extremely robust barrier manufactured from solid steel components with an aggressive press formed triple point top on each picket.

**TRIPLE POINT™** is used extensively throughout the UK and Europe in applications requiring extreme security including power stations, defence facilities, airports etc.

**TRIPLE POINT™** has the unique ability to allow panels to be installed on sloping ground, following all contours up to 15°.

**TRIPLE POINT™** is a complete modular system which is extremely simple to install. All individual components are hot dip galvanized prior to site assembly giving this system superior durability.

# SPECIFICATIONS

## Panel

### Description

**TRIPLE POINT™** comprises of roll formed pickets with an aggressive triple point spear top fixed to a top and bottom horizontal rail using tamper proof fasteners.

### Finish

Standard finish is Hot Dip Galvanised with an option of polyester powder coating.

### Dimensions

Height:	2350mm or 2950mm
Width:	2720mm
Picket:	70 x 18 x 3 x 2350 or 2950mm
Rails:	50 x 50 x 6 x 2720mm Steel Angle

## Post

### Description

The posts are supplied complete ready to install with slotted holes for fish plate assembly.

### Finish

Standard finish is Hot Dip Galvanised with an option of polyester powder coating.

### Dimensions

Length:	3200 or 3800mm
Size:	100 x 45 TFB (7.2kg/metre)
Post centres:	2750mm

## Specification Clauses

To be read with preliminaries and general conditions

Steel picket security fence/gates

- Manufacturer & Ref: JAGFENCE SYSTEMS  
Tel: 1800 628 785. **TRIPLE POINT™** palisade
- Height:  
Pickets: 70 x 18 x 3mm roll formed steel W section at 154mm centres with triple point spear top
- Rails: 50 x 50 x 6mm steel angle
- Post: 100 x 45 TFB (7.2kg/metre)
- Fish Plate: 40 x 6mm steel plate
- Coating: All components to be Hot Dip Galvanised (minimum 500 gsm)
- Footings: Set posts in 20 mpa concrete footing 250mm diameter x 900mm deep
- Post Centres: 2750mm
- Fixings: Picket to Rail – M8 x 20 T-bolt with flat washer & shear nut. Rail to Fish Plate – M12 Bolt with flat washer & shear nut.
- Bottom of fence to be installed 50mm above ground level



## Variations

In addition to the standard posts, rails and pickets, many variations are available including:

- Alternative posts and rail sections
- Pickets with cranked tops
- Extensions for barb, razor or electric toppings

## Other services

- Gate manufacture (swing and sliding)
- Site deliveries

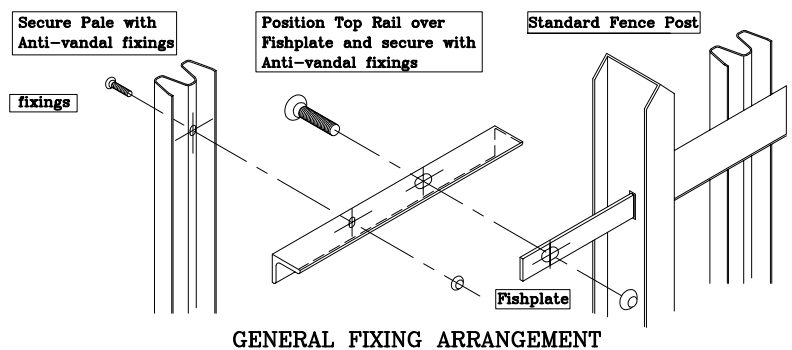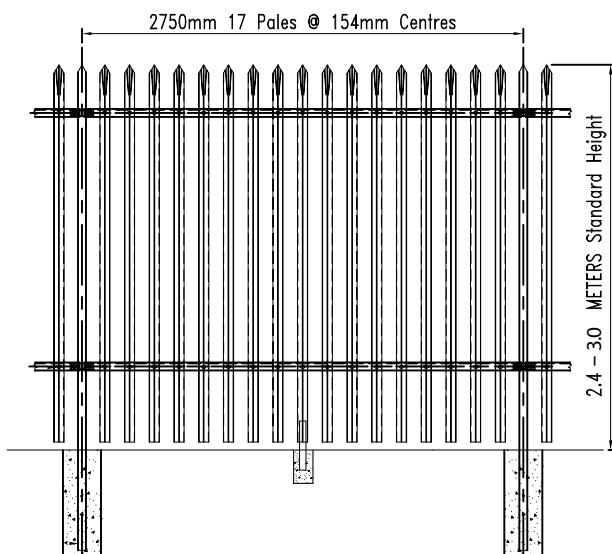

Distributed by:



**JAGFENCE SYSTEMS**

Phone: 1800 628 785 Fax: 1800 628 795

All information correct at time of going to print. We reserve the right to alter specifications without notice.